

# MCO SERIES

## Metallized Polycarbonate

### Metallized Polycarbonate Wrap & Fill Tubular Configuration

The MCO Series is specifically designed for low-drift, tight tolerance applications that require voltage to 400VDC, a continuous operating temperature to 125°C and capacitance tolerance as low as 1%. There is also a temperature coefficient of  $\pm 100\text{ppm}$  and a dissipation factor  $< 0.3\%$ .



#### FEATURES

- 1% Capacitor Tolerance
- Dual Moisture Seal Construction
- Superior Protection Against Hostile Environments
- Manufactured to MIL Standards

#### STANDARD CONFIGURATION

- Wrap & Fill Tubular Configuration.

# Specification Summary

Capacitance Range  
0.0010 $\mu$ F to 20.0 $\mu$ F Capacitance shall be measured at 25°C and at or referred to a frequency of 1 kHz.

Capacitance Tolerance  
Standard tolerance is  $\pm 1\%$ ,  $\pm 2\%$ ,  $\pm 5\%$ ,  $\pm 10\%$

Operating Temperature Range  
-55°C to +125°C

Enclosure/ Construction  
Extended metallized Polycarbonate film (non-inductive)

Voltage Rating  
DC working voltage ratings at +125°C are 100VDC, 200VDC and 400VDC

Quality Control  
Capacitors are tested 100% for:  
o Capacitance  
o Tolerance  
o Dissipation Factor  
o Dielectric withstanding Voltage  
o Insulation Resistance  
o Equivalent Series Resistance (ESR)

Process and inspection data are maintained on file and available on special request.


Environmental

Parameter	Method	Condition
Vibration	204	D
Shock	213	I
Humidity	106	-
Thermal Shock	107	A
Life	108	F
Reference MIL-STD-202		

## Characteristics

Insulation Resistance

Temperature(°C)	25	85	125	
Megaohmsx Microfarads	50,000	5,000	500	
Insulation Resistance				

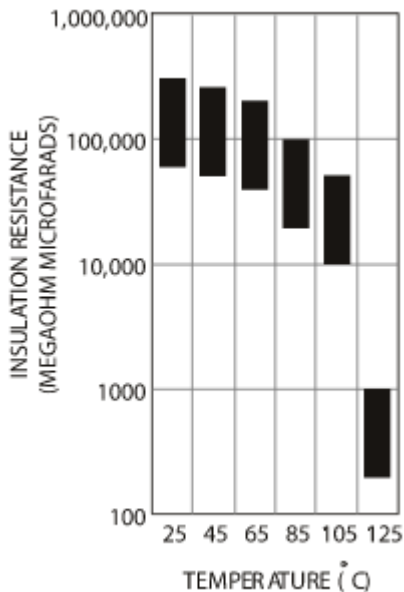


Dielectric Strength

Capacitors shall withstand a DC potential of 200% rated voltage for two (2) minutes without damage or breakdown. Test voltage must be applied and discharged through a resistance of 1 OHM per volt, minimum and at 25°C.


Capacitance Change

Temperature(°C)	-55	25	85	125
Percentage Change (typical)	-2.5	0	$\pm 1.0$	$\pm 2.0$
Capacitance Change				

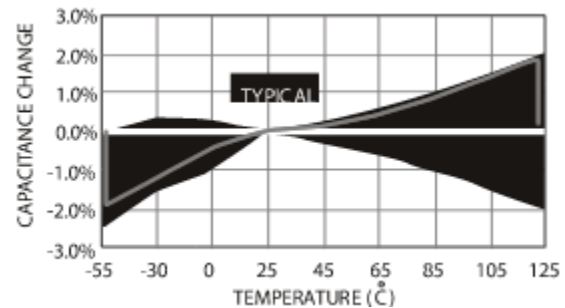

Dissipation Factor

When measured at 1kHz, the dissipation factor shall not exceed 0.3% from +25°C to +125°C.

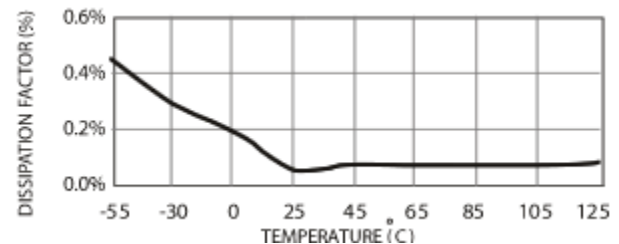

# ELECTRICAL DATA

EC PART NUMBER	MFD	100 VDC			200 VDC			400 VDC		
		D			F			J		
		D	L	AWG	D	L	AWG	D	L	AWG
MC02_102_	0.0010	0.15	0.40	24	0.15	0.40	24	0.15	0.40	24
MC02_122_	0.0012	0.15	0.40	24	0.15	0.40	24	0.15	0.40	24
MC02_152_	0.0015	0.15	0.40	24	0.15	0.40	24	0.15	0.40	24
MC02_182_	0.0018	0.15	0.40	24	0.15	0.40	24	0.15	0.40	24
MC02_222_	0.0022	0.15	0.40	24	0.15	0.40	24	0.15	0.40	24
MC02_272_	0.0027	0.15	0.40	24	0.15	0.40	24	0.15	0.40	24
MC02_332_	0.0033	0.15	0.40	24	0.15	0.40	24	0.15	0.40	24
MC02_392_	0.0039	0.15	0.40	24	0.15	0.40	24	0.16	0.40	24
MC02_472_	0.0047	0.15	0.40	24	0.15	0.40	24	0.17	0.40	24
MC02_562_	0.0056	0.15	0.40	24	0.15	0.40	24	0.15	0.53	24
MC02_682_	0.0068	0.15	0.40	24	0.15	0.40	24	0.15	0.53	24
MC02_822_	0.0082	0.15	0.40	24	0.15	0.40	24	0.15	0.53	24
MC02_103_	0.0100	0.15	0.40	24	0.15	0.40	24	0.17	0.53	24
MC02_123_	0.0120	0.15	0.40	24	0.15	0.40	24	0.18	0.53	24
MC02_153_	0.0150	0.15	0.40	24	0.15	0.40	24	0.20	0.53	24
MC02_183_	0.0180	0.15	0.40	24	0.16	0.40	24	0.22	0.53	24
MC02_223_	0.0220	0.15	0.40	24	0.17	0.40	24	0.24	0.53	24
MC02_273_	0.0270	0.15	0.40	24	0.15	0.53	24	0.27	0.53	24
MC02_333_	0.0330	0.15	0.40	24	0.15	0.53	24	0.29	0.53	24
MC02_393_	0.0390	0.15	0.40	24	0.16	0.53	24	0.27	0.68	24
MC02_473_	0.0470	0.15	0.40	24	0.18	0.53	24	0.30	0.68	24
MC02_563_	0.0560	0.16	0.40	24	0.19	0.53	24	0.33	0.68	24
MC02_683_	0.0680	0.18	0.40	24	0.21	0.53	24	0.32	0.78	22
MC02_823_	0.0820	0.15	0.53	24	0.23	0.53	24	0.35	0.78	22
MC02_104_	0.1000	0.16	0.53	24	0.25	0.53	24	0.38	0.78	22
MC02_124_	0.1200	0.17	0.53	24	0.27	0.53	24	0.41	0.78	22
MC02_154_	0.1500	0.19	0.53	24	0.31	0.53	24	0.40	0.95	22
MC02_184_	0.1800	0.20	0.53	24	0.29	0.68	24	0.44	0.95	22
MC02_224_	0.2200	0.22	0.53	24	0.32	0.68	24	0.41	1.17	22
MC02_274_	0.2700	0.24	0.53	24	0.32	0.78	24	0.45	1.17	20
MC02_334_	0.3300	0.26	0.53	24	0.35	0.78	22	0.50	1.17	20
MC02_394_	0.3900	0.29	0.53	24	0.38	0.78	22	0.54	1.17	20
MC02_474_	0.4700	0.26	0.68	24	0.41	0.78	22	0.59	1.17	20
MC02_564_	0.5600	0.29	0.68	24	0.39	0.95	22	0.64	1.17	20
MC02_684_	0.6800	0.29	0.78	24	0.36	1.17	22	0.65	1.45	20
MC02_824_	0.8200	0.31	0.78	24	0.39	1.17	22	0.63	1.70	20
MC02_105_	1.0000	0.34	0.78	24	0.44	1.17	22	0.66	1.90	20
MC02_125_	1.2000	0.37	0.78	22	0.48	1.17	20	0.72	1.90	20
MC02_155_	1.5000	0.37	0.95	22	0.53	1.17	20	0.80	1.90	20
MC02_185_	1.8000	0.40	0.95	22	0.58	1.17	20	0.87	1.90	20
MC02_205_	2.0000	0.38	1.17	22	0.61	1.17	20	0.92	1.90	20
MC02_255_	2.5000	0.42	1.17	22	0.62	1.45	20	-	-	-
MC02_305_	2.0000	0.45	1.17	22	0.61	1.70	20	-	-	-
MC02_355_	3.5000	0.48	1.17	20	0.66	1.70	20	-	-	-
MC02_405_	4.0000	0.52	1.17	20	0.66	1.90	20	-	-	-
MC02_455_	4.5000	0.55	1.17	20	0.70	1.90	20	-	-	-
MC02_505_	5.0000	0.58	1.17	20	0.73	1.90	20	-	-	-
MC02_605_	6.0000	0.62	1.17	20	0.80	1.90	20	-	-	-
MC02_805_	8.0000	0.63	1.45	20	0.92	1.90	20	-	-	-


Note: The fifth character of the part number represents the DC voltage rating (i.e. D=100 VDC, F=200 VDC, etc.). Additionally, the tenth character of the part number represents the Tolerance (K=±10%, J=±5%, G=±2%, F=±1%).



EC PART NUMBER	MFD	100 VDC			200 VDC			400 VDC		
		D			F			J		
		D	L	AWG	D	L	AWG	D	L	AWG
MC02_106_	10.0000	0.64	1.70	20	1.02	1.90	20	-	-	-
MC02_126_	12.0000	0.65	1.90	20	-	-	-	-	-	-
MC02_156_	15.0000	0.72	1.90	20	-	-	-	-	-	-
MC02_186_	18.0000	0.78	1.90	20	-	-	-	-	-	-
MC02_206_	20.0000	0.82	1.90	20	-	-	-	-	-	-

Note: The fifth character of the part number represents the DC voltage rating (i.e. D=100 VDC, F=200 VDC, etc.).  
 Additionally, the tenth character of the part number represents the Tolerance (K=±10%, J=±5%, G=±2%, F=±1%).

## Mechanical Data

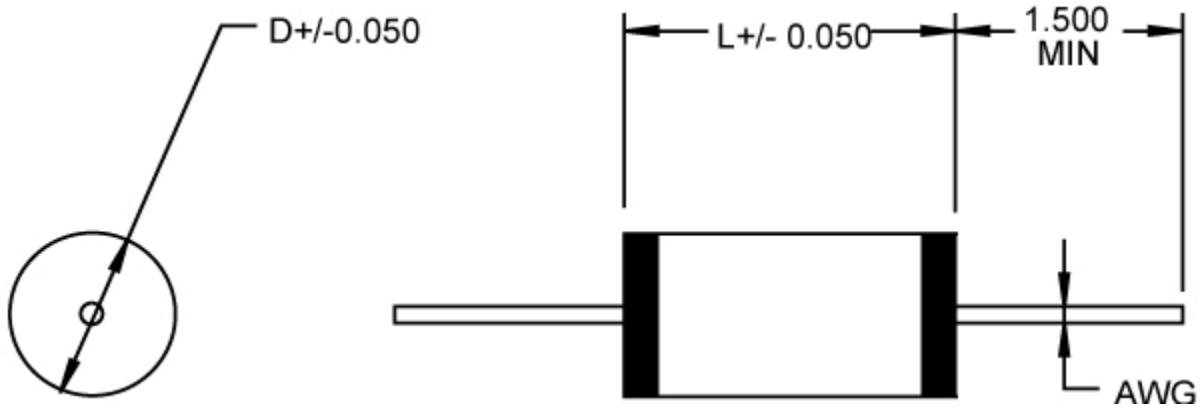

## ADDITIONAL INFORMATION

The MC0 Series is a new polycarbonate, film capacitor developed by Electronic Concepts to meet the ever changing, more demanding requirements of circuit designers. Although not called for, it is built to MIL-PRF-55514 to maximize reliability. The MC0 Series is specifically designed for low-drift, tight tolerance applications that require voltage to 400VDC, a continuous operating temperature to 125°C and capacitance tolerance as low as 1%. There is also a temperature coefficient of  $\pm 100$ ppm and a dissipation factor  $< 0.3\%$ . Importantly, the MC0 Series features a unique dual moisture seal construction (versus the single seal method of others). Dual sealing ensures greater overall electrical integrity with long term stability - and imparts the ability to accommodate adverse environments normally associated with the electronic industry.

With the introduction of the MC0 Series, the designer can now build in more performance with greater reliability and operating protection. Plus overall system cost savings can often be realized.

## HOW TO ORDER

TYPE Metallized Polycarbonate	→	MC0
STYLE / VOLTAGE D=100VDC, F=200VDC, J=400VDC	→	2 J
CAPACITANCE IN PICO FARADS The first two digits are significant, the third represents the number of zeros (e.g. 475=4,700,000pF)	→	106
TOLERANCE K= $\pm 10\%$ J=5% G 2% F=1%	→	K

### Marking and Date Code

All capacitors are marked with company initials "EC", corporate logo or EC trademark—in addition to type MC0, capacitance, tolerance, rated DC working voltage and date code. The first two digits of the date code represent the year, the second two digits the week, i.e., 0952 is the 52nd week of 2009, 0902 is the second week of 2009.

### Quality Assurance

Major emphasis is placed on quality assurance. EC is an ISO 9001-2000 and AS9100:2004 Certified Company. Raw material inspection and the use of SPC manufacturing procedures assure the highest quality standards. Procedures are fully described in the EC Quality Control Manual. Electronic Concepts will continue to advance the state-of-the-art by utilizing leading edge technology, compact capacitor designs and establishing reliability procedures.

## Sales

### United States Headquarters

Electronic Concepts, Inc.  
526 Industrial Way West  
Eatontown, NJ 07724  
Tel: 732-542-7880  
Fax: 732-542-0524

email: [sales@ecicaps.com](mailto:sales@ecicaps.com)  
website: [www.ecicaps.com](http://www.ecicaps.com)

### Distribution Center

Elcon Sales  
542 Industrial Way West  
Eatontown, NJ 07724  
Tel: 732-380-0405  
Fax: 732-380-0409

email: [sales@elconsales.com](mailto:sales@elconsales.com)

### European Headquarters

Electronic Concepts Europe LTD  
IDA Estate  
Oughterard  
Co. Galway  
Ireland  
tel: +353-91-552385,552432  
fax: +353-91-552387

email: [sales@ecicaps.ie](mailto:sales@ecicaps.ie)  
website: [www.electronicconcepts.ie](http://www.electronicconcepts.ie)

